
Apex Adjustable






		LED Power	Lumens (at 3000K)	Beam	Weight
1	Apex Adjustable	8W (200mA)	654lm	15° | 40° | 60° | 92°	354g
		10W (250mA)	817lm		
		13W (300mA)	981lm		
		15W (350mA)	1144lm		

Key Information	
Mounting	Ceiling Recessed
Finish	Textured Black Textured White
LED CCT	2700K 3000K 4000K
Warranty	5 Years

Design	
Product Family	Apex
Adjustability	350° Rotation, 45° Tilt
Material	Powder Coated Aluminium
IP Rating	IP65 (Room Side)
IK Rating	IK08, IK10
Class Rating	Class II
Insulation Rating	IC-4

Performance	
Lumen Efficacy	Up to 76lm/W
CRI (Ra/R9)	92+ (R9: >50)
UGR (70/50/20)	<19
Lifetime (Ta 25°C)	>55,000h L90B10
Operating Ambient Temperature	-10°- 35°C
SDCM	≤2
COI Compliance Model Requirements	4000K

Driver	
Phase Cut	Remote
DALI	Remote
Bluetooth	Remote

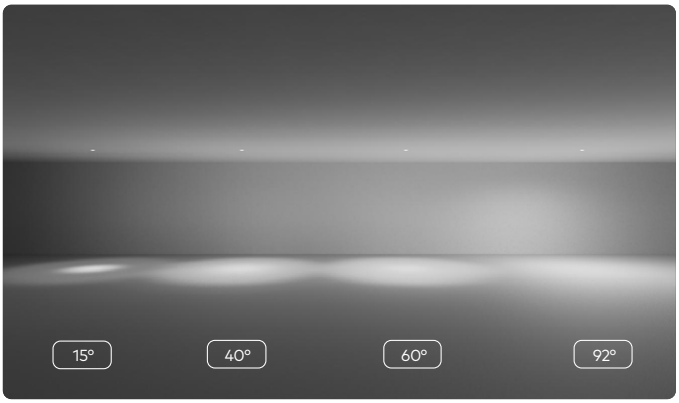

Available Accessories
Linear Lens (for elliptical beam)
Frosted Lens (for 92° beam)
IK10 Clear Lens (for IK10 rating)