Surge Protection
For comprehensive protection of a luminaire against electrical surges, surge protection shall be installed on the mains supply where required to protect luminaires and drivers from transient voltage damage.

For warranty information visit unios.com/warranty

Please read these installation instructions carefully before installing this luminaire. This product must be installed and maintained by a suitably qualified person/s in compliance with the latest applicable regulations and relevant legislation.

Unios does not warrant any claim based on defects or damage caused by misuse, improper installation, improper operation and/or modifications carried out by the purchaser or third parties. This luminaire will not be used as a 'Working light' during construction. This will result in the warranty of the luminaire to be void. For warranty duration, please refer to the data sheet.

Cleaning

Always clean carefully using a soft cloth and a ph-neutral, alcohol-free, non-abrasive cleaning cloth. Clean & Maintain the finish twice a year to avoid rust, oxidation or limescale deposits. If this entire surface is not cleaned correctly, the finish may become uneven.

Do not use abrasive pads, discs, sandpaper and/or high pressure hose/gun to clean the luminaire.

Disposal

Ensure correct disposal of this product (waste electrical and electronic equipment)

Zenith

WALL LIGHT


Base Codes | **2W** ZENI0002

IP65


Class III 24V DC | **Material** Aluminium, PC Wallbox | **Install Person/s** 1x | **Power** 2 Watts

CAUTION – This product must be installed by a qualified installer
Please read instruction manual carefully before installing luminaire


Luminaire



Wallbox

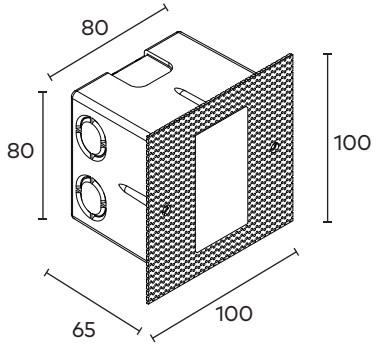

Parts



Wallbox

2x


Heatshrink
Solder Joiners

All measurements are in millimetres.


CAUTION

Switch off main electrical power prior to installing and powering this luminaire.

Do not open luminaire whilst the main electrical power is active.

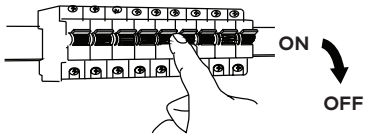


Product installation




All measurements are in millimetres.

Prepare cutout for installation of Luminaire only.

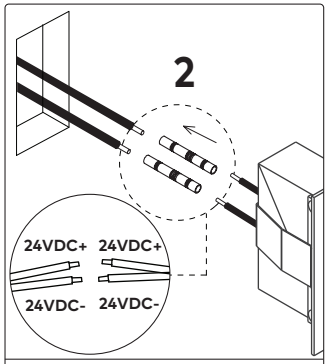


Feed cables through and terminate connections to Luminaire using heatshrink joiners provided to ensure IP65 connection (if required).




Insert the luminaire into place with spring clips

Wallbox installation




All measurements are in millimetres.

Prepare cutout for installation of Wallbox with Luminaire.




Feed cable through and set wall-box into cut-out with plaster or suitable compound.



Terminate connections to Luminaire using heatshrink joiners to ensure IP65 connection (if required) and insert luminaire.

Wiring

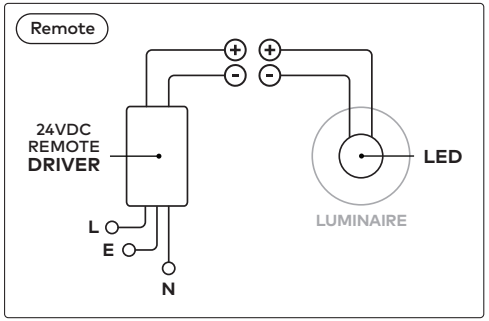

Driver Selection

Product Code	Output Power	Forward Voltage
ZENI0002	2W	24VDC

Dimming

For dimming capabilities, luminaire must be paired with dimmable electronic control gear, wired in parallel. Please refer to control gear's instructions for pairing of suitable systems.