




Small (80mm)





Medium (105mm)





Large (145mm)


		LED Power	Lumens (at 3000K)	Beam	Weight	Dusk Dimming
1	**Small (80mm)**	8W (200mA)	710lm	15° | 40° | 60° | 92°	244g	-
		10W (250mA)	888lm			-
2	**Medium (105mm)**	8W (200mA)	762lm	15° | 40° | 60° | 92°	408g	Yes
		10W (250mA)	876lm			
		13W (300mA)	1052lm			Yes
		15W (350mA)	1227lm			Yes
3	Large (145mm)	25W (700mA)	2431lm	15° | 40° | 60° | 75°	690g	-

Key Information	
Mounting	Ceiling Recessed
Finish	Textured Black Textured White
LED CCT	2700K 3000K 4000K 3000K-1800K (Dusk Dimming)
Warranty	5 Years

Design	
Product Family	Apex
Material	Powder Coated Aluminium
IP Rating	IP65 (Room Side)
IK Rating	IK10 (Optional)
Class Rating	Class II
Insulation Rating	IC

Performance	
Lumen Efficacy	Up to 94lm/W
CRI (Ra/R9)	92+ (R9: >50)
UGR (70/50/20)	<19, <25 (Frosted Lens)
Lifetime (Ta 25°C)	>55,000h L90B10
Operating Ambient Temperature	-10°- 35°C
SDCM	≤2
COI Compliance Model Requirements	4000K

Driver	
Phase Cut	Remote
DALI	Remote
Bluetooth	Remote

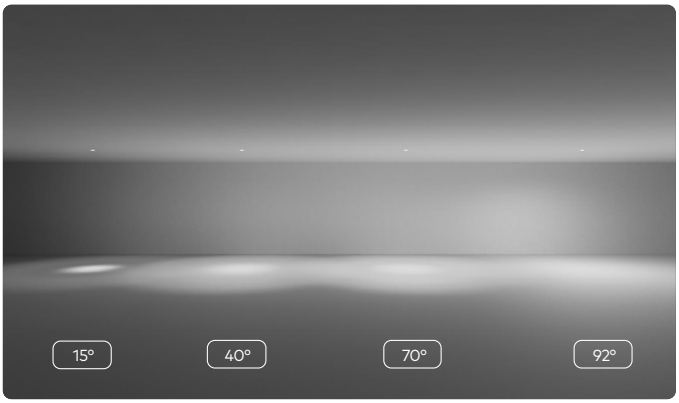

Available Accessories
Surface Mount Canister
Linear Lens (for elliptical beam)
Frosted Lens (for 75° and 92° beam)
IK10 Clear Lens (for IK10 rating)