


Apex


Surface Mounted Downlight






Small (85mm)





Medium (110mm)





Large (150mm)


		LED Power	Lumens (at 3000K)	Beam	Weight	Dusk Dimming
1	**Small (85mm)**	8W (200mA)	710lm	15° | 40° | 60° | 92°	844g	-
		10W (250mA)	888lm			
2	**Medium (110mm)**	8W (200mA)	762lm	15° | 40° | 60° | 92°	1.2kg	Yes
		10W (250mA)	876lm			
		13W (300mA)	1052lm			
		15W (350mA)	1227lm			
3	Large (150mm)	25W (700mA)	2431lm	15° | 40° | 60° | 75°	1.9kg	-

Key Information	
Mounting	Ceiling Surface
Finish	Textured Black Textured White Textured Black/White Textured White/Black
LED CCT	2700K 3000K 4000K 3000K-1800K (Dusk Dimming)
Warranty	5 Years

Design	
Product Family	Apex
Material	Powder Coated Aluminium
IP Rating	IP20
IK Rating	IK10 (Optional)
Class Rating	Class I

Performance	
Lumen Efficacy	Up to 94lm/W
CRI (Ra/R9)	92+ (R9: >50)
UGR (70/50/20)	<19, <25 (Frosted Lens)
Lifetime (Ta 25°C)	>55,000h L80B10
Operating Ambient Temperature	-10°- 35°C
SDCM	≤2
COI Compliance Model Requirements	4000K

Driver	
Phase Cut	Built-in
DALI	Remote
Bluetooth	Remote

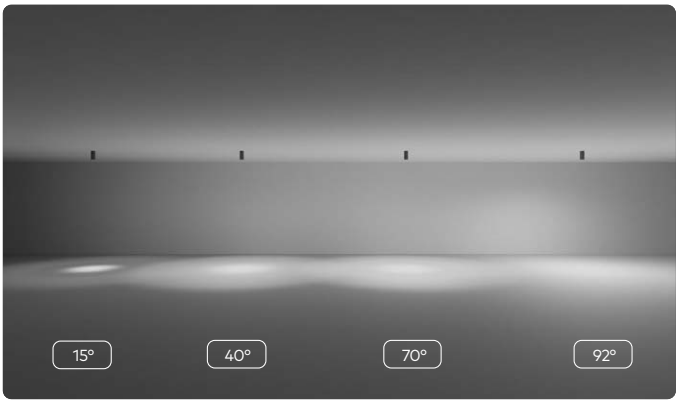

Available Accessories
Linear Lens (for elliptical beam)
Frosted Lens (for 75° and 92° beam)
IK10 Clear Lens (for IK10 rating)