

Athena Max


Series






Surface Mounted





Fixed One Wall





Fixed Two Wall


		LED Power	Lumens (at 3000K)	Beam	Weight
1	**Surface Mounted**	38W (1000mA)	3774lm	15° | 36° | 60°	2.9kg
2	**Fixed One Wall**	38W (1000mA)	3774lm	15° | 36° | 60°	3.0kg
3	**Fixed Two Wall**	38W (1000mA)	4042lm	15° | 36° | 60°	3.7kg

Key Information	
Mounting	Ceiling Surface, Wall Surface
Finish	Textured Black Textured White
LED CCT	3000K 4000K
Warranty	5 Years

Design	
Product Family	Athena
Material	Powder Coated Aluminium
IP Rating	IP66
IK Rating	IK10
Class Rating	Class I

Performance	
Lumen Efficacy	Up to 113lm/W
CRI (Ra/R9)	80+ (R9: >0)
UGR (70/50/20)	<16
Lifetime (Ta 25°C)	>55,000h L90B10
Operating Ambient Temperature	-10°- 35°C
SDCM	≤2


Driver	
Phase Cut	Built-in
DALI	Built-in
Bluetooth	Remote

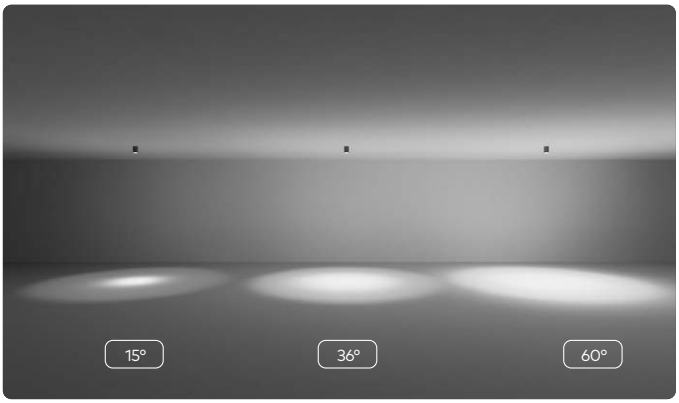


Available Accessories
Linear Lens (for elliptical beams)
Honeycomb Lens (for reduced glare)

Athena Max

Catenary Light






		LED Power	Lumens (at 3000K)	Beam	Weight
1	Athena Max Catenary	38W (1000mA)	3774lm	15° | 36° | 60°	3.2kg

Key Information	
Mounting	Catenary Suspended
Finish	Textured Black
LED CCT	3000K 4000K
Warranty	5 Years

Design	
Product Family	Athena
Material	Powder Coated Aluminium
IP Rating	IP66
IK Rating	IK10
Class Rating	Class I
Catenary Wire Diameter	5-8mm
Max. Cable Diameter	12mm

Performance	
Lumen Efficacy	Up to 113lm/W
CRI (Ra/R9)	80+ (R9: >0)
UGR (70/50/20)	<16
Lifetime (Ta 25°C)	>55,000h L90B10
Operating Ambient Temperature	-10°- 35°C
SDCM	≤2

Driver	
Phase Cut	Built-in
DALI	Built-in
Bluetooth	Remote

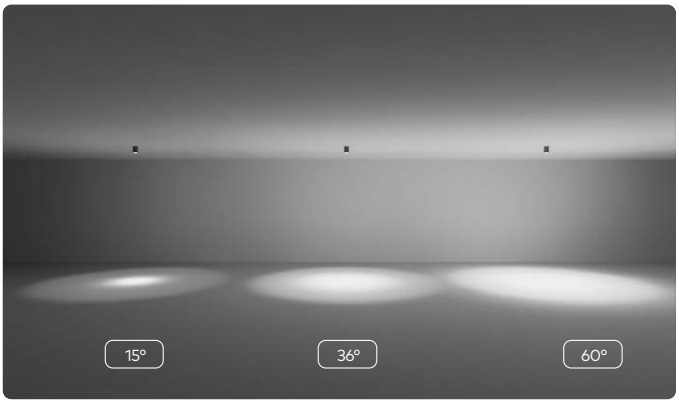

Available Accessories
Linear Lens (for elliptical beams)
Honeycomb Lens (for reduced glare)