Duo


4880


DesignBy Ramos & Bassols

Duo is a ceiling light with surface installation where the natural warm appearance of the oak wood on the inside is combined with the technical refinement of the aluminium metal wrap on the outside.

Model Sheet





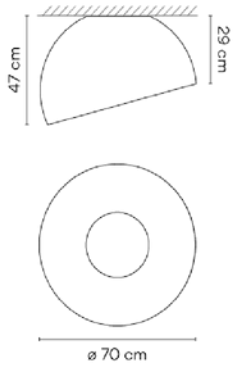

Finish	58 Cream RAL 7044 18 Graphite ADAPTA RF 9913 93 White RAL 9016
LED	2700 K / 3500 K / Tunable White
Control	DALI-2 / Casambi / Push; 1-10V;
Electrical connection	Surface Canopy
Light source	1 x LED PLATE 26W 500mA F
LED	CRI>90 2068 lm 109
Driver	Constant Current 500 mA 110~240 V 50/60 Hz F Dimmable LED IP20 Multi-volt 4880 _ _ / 81: Tunable White + DALI-2 DT8
Application	Ceiling
Packaging	1 Box 0.593 m x 0.785 m x 0.785 m Gross weigth 20.6 kg Net weigth 14 kg Vol. 0.3654 m3


Lighting effect


General

First layer of basic, general illumination



Photometric Data

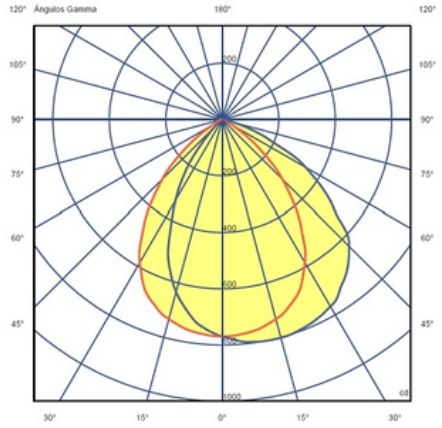

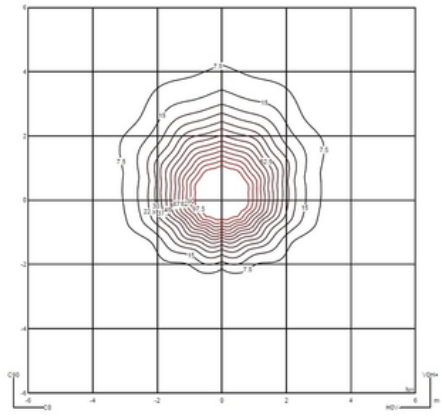

Efficiency	51.35 lm/W
Coordinate System	CG
Total Flux	1343.81 lm
Maximum Value	801.14 cd

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T+34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Duo

4878


DesignBy Ramos & Bassols

Duo is a ceiling light with surface installation where the natural warm appearance of the oak wood on the inside is combined with the technical refinement of the aluminium metal wrap on the outside.

Model Sheet








Finish	58 Cream RAL 7044
	18 Graphite ADAPTA RF 9913
	93 White RAL 9016
LED	2700 K / 3500 K / Tunable White
Control	Casambi / Push; 1-10V; DALI-2 /
Electrical connection	Surface Canopy
Light source	1 x LED PLATE 26W 500mA
	F
LED	CRI>90 2206 lm 98
Driver	Constant Current 500 mA 110~240 V 50/60 Hz
	F Dimmable LED IP20 Multi-volt
	4878 _ _ / 81: Tunable White + DALI-2 DT8
Application	Ceiling
Packaging	1 Box 0.593 m x 0.785 m x 0.785 m Gross weigth 20.3 kg Net weigth 14 kg Vol. 0.3654 m3


Lighting effect


General

First layer of basic, general illumination



Photometric Data

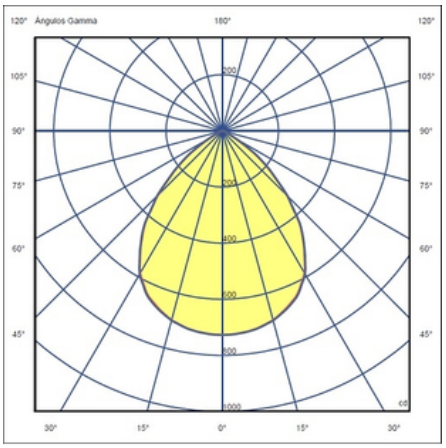

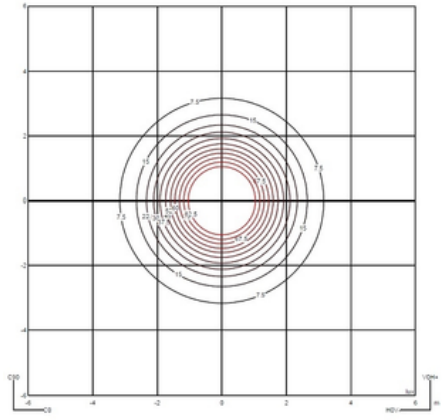

Efficiency	49.81 lm/W
Coordinate System	CG
Total Flux	1284.41 lm
Maximum Value	727.04 cd

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T+34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Duo

4876


DesignBy Ramos & Bassols

Duo is a ceiling light with surface installation where the natural warm appearance of the oak wood on the inside is combined with the technical refinement of the aluminium metal wrap on the outside.

Model Sheet







Finish	18 Graphite ADAPTA RF 9913
	93 White RAL 9016
	58 Cream RAL 7044
LED	2700 K / 3500 K / Tunable White
Control	Casambi / DALI-2 / Push; 1-10V
Electrical connection	Surface Canopy
Light source	1 x LED PLATE 12W 350mA G
LED	CRI>90 1100 lm 91.66
Driver	Constant Current 350 mA 110~240 V 50/60 Hz F Dimmable LED IP20 Bi-volt 4876 _ _ / _ 1: Static White + DALI-2 4876 _ _ / _ B: Static White + Push; 4876_ _ / 81: Tunable White + DALI-2 DT8
Application	Ceiling
Packaging	1 Box 0.436 m x 0.436 m x 0.348 m Gross weigth 6 kg Net weigth 4 kg Vol. 0.0661 m3


Lighting effect


General

First layer of basic, general illumination



Photometric Data

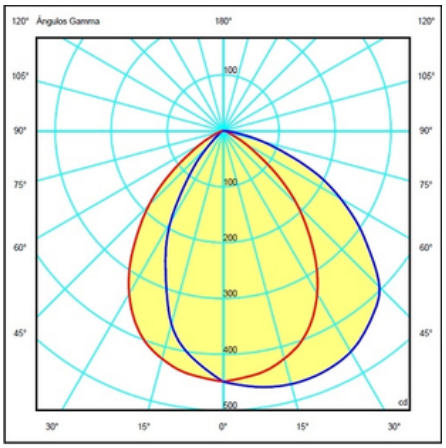

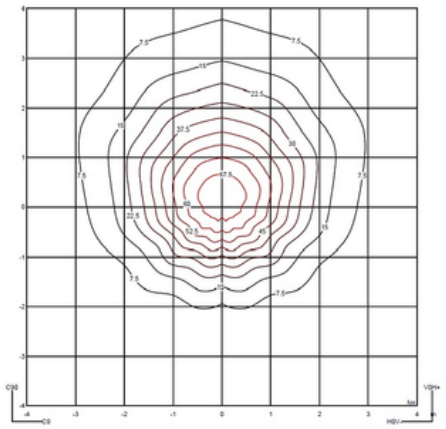

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina

Progrés4-6,08850Gavà. Barcelona, Spain.

International T+34 934 796 971

Spain / Portugal T +34 934 796 970

customer.service@vibia.com

vibia.com

Duo

4874


DesignBy Ramos & Bassols

Duo is a ceiling light with surface installation where the natural warm appearance of the oak wood on the inside is combined with the technical refinement of the aluminium metal wrap on the outside.

Model Sheet







Finish	58 Cream RAL 7044
	93 White RAL 9016
	18 Graphite ADAPTA RF 9913
LED	2700 K / 3500 K / Tunable White
Control	Push; 1-10V / DALI-2 / Casambi
Electrical connection	Surface Canopy
Light source	1 x LED PLATE 12W 350mA G
LED	CRI>90 1100 lm 91.66
Driver	Constant Current 350 mA 110~240 V 50/60 Hz F Dimmable IP20 Bi-volt Multi-volt 4874 _ _ / _ 1: Static White + DALI-2 4874 _ _ / _ B: Static White + Push; 4874 _ _ / 81: Tunable White + DALI-2 DT8
Application	Ceiling
Packaging	1 Box 0.436 m x 0.436 m x 0.348 m Gross weigth 6 kg Net weigth 4 kg Vol. 0.0661 m3


Lighting effect


General

First layer of basic, general illumination



Photometric Data

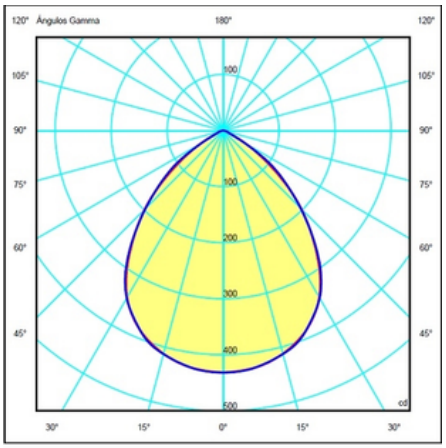

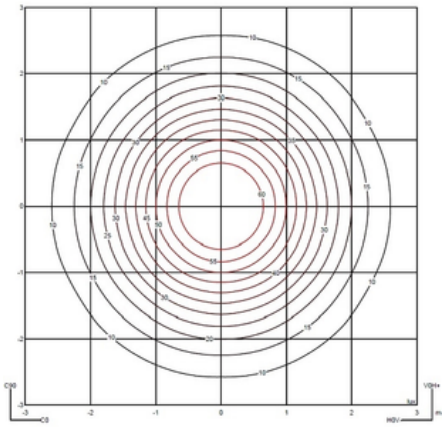

Efficiency	55.92 lm/W
Coordinate System	CG
Total Flux	779.09 lm
Maximum Value	431.43 cd

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina

Progrés4-6,08850Gavà. Barcelona, Spain.

International T+34 934 796 971

Spain / Portugal T +34 934 796 970

customer.service@vibia.com

vibia.com