Duo petra

4881


DesignBy Ramos&Bassols

Duo Petra is a surface installed ceiling light where the interior features the natural appearance of slate. The angled ceiling model is perfect for directing its diffuse lighting towards the required location

Model Sheet





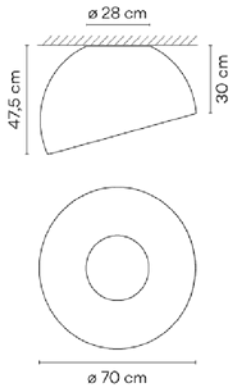

Finish	58 Cream RAL 7044
	93 White RAL 9016
	18 Graphite ADAPTA RF 9913
LED	2700 K / 3500 K / Tunable White
Control	PUSH 1-10V DALI / DALI / CASAMBI
Electrical connection	Surface Canopy
Light source	1 x LED PLATE 26W 500mA
	F
LED	CRI>90 2068 lm 109
Driver	Constant Current 500 mA 110~240 V 50/60 Hz
	Dimmable LED IP20 Multi-volt
	4881 _ _ / 81: Tunable White + DALI-2 DT8
Application	Ceiling
Packaging	1 Box 0.593 m x 0.785 m x 0.785 m Gross weigth 16 kg Net weigth 14 kg Vol. 0.3654 m3


Lighting effect


General

First layer of basic, general illumination



Photometric Data

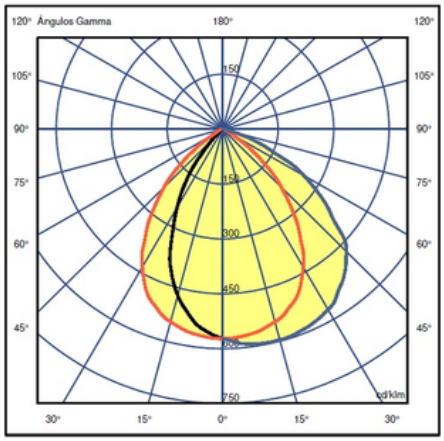

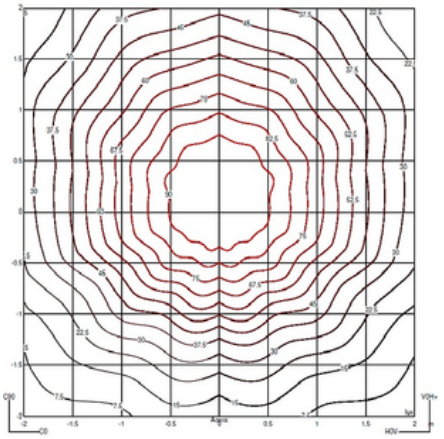

Efficiency	47.803 lm/W
Coordinate System	CG
Total Flux	1251 lm
Maximum Value	596.17 cd/klm

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T+34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Duo petra

4879


DesignBy Ramos&Bassols

Duo Petra is a surface installed ceiling light where the interior features the natural appearance of slate. The Duo Petrea ceiling light becomes a focal point without needing to be suspended.

Model Sheet





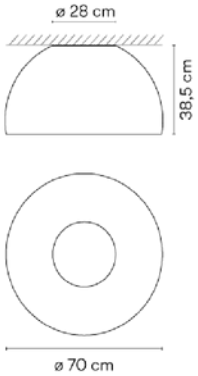


Finish	18 Graphite ADAPTA RF 9913
	93 White RAL 9016
	58 Cream RAL 7044
LED	2700 K / 3500 K / Tunable White
Control	DALI / CASAMBI / PUSH 1-10V DALI
Electrical connection	Surface Canopy
Light source	1 x LED PLATE 26W 500mA F
LED	CRI>90 2206 lm 98
Driver	Constant Current 500 mA 110~240 V 50/60 Hz F Dimmable LED IP20 Multi-volt
	4879 _ _ / 81: Tunable White + DALI-2 DT8
Application	Ceiling
Packaging	1 Box 0.593 m x 0.785 m x 0.785 m Gross weigth 16 kg Net weigth 14 kg Vol. 0.3654 m3


Lighting effect


General

First layer of basic, general illumination



Photometric Data

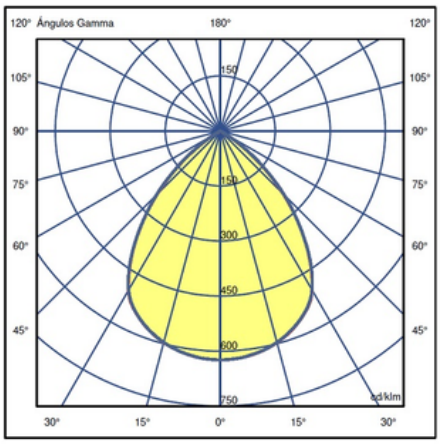

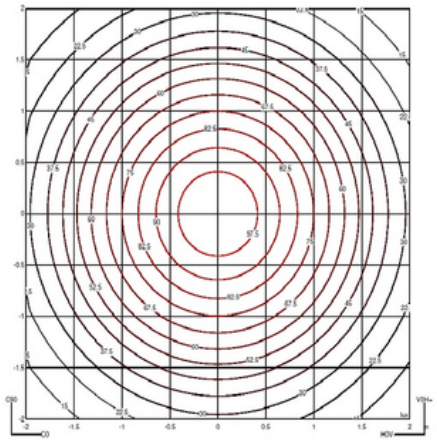

Efficiency	46.739 lm/W
Coordinate System	CG
Total Flux	1201.8 lm
Maximum Value	623.60 cd/klm

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina

Progrés4-6,08850Gavà. Barcelona, Spain.

International T+34 934 796 971

Spain / Portugal T +34 934 796 970

customer.service@vibia.com

vibia.com

Duo petra

4877


DesignBy Ramos&Bassols

Duo Petra is a surface installed ceiling light where the interior features the natural appearance of slate. The angled ceiling model is perfect for directing its diffuse lighting towards the required location.

Model Sheet







Finish	18 Graphite ADAPTA RF 9913
	58 Cream RAL 7044
	93 White RAL 9016
LED	2700 K / 3500 K / Tunable White
Control	DALI / CASAMBI / PUSH 1-10V
Electrical connection	Surface Canopy
Light source	1 x LED PLATE 12W 350mA G
LED	CRI>90 1100 lm 91.66
Driver	Constant Current 350 mA 110~240 V 50/60 Hz F Dimmable LED IP20 Bi-volt 4877 _ _ / _ 1: Static White + DALI-2 4877 _ _ / _ B: Static White + Push; 4877 _ _ / 81: Tunable White + DALI-2 DT8
Application	Ceiling
Packaging	1 Box 0.436 m x 0.436 m x 0.348 m Gross weigth 5 kg Net weigth 4 kg Vol. 0.0661 m3


Lighting effect


General

First layer of basic, general illumination



Photometric Data

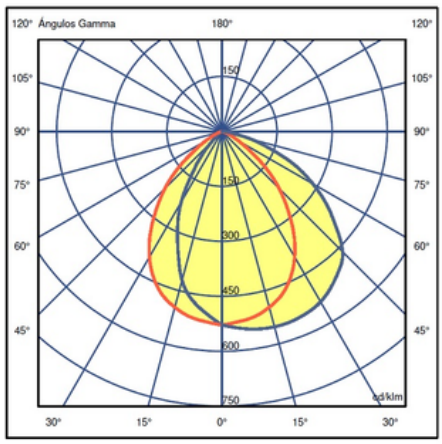

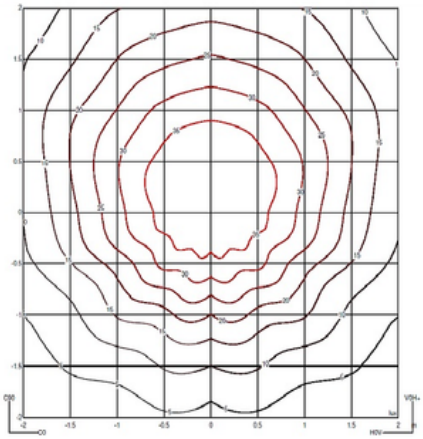

Efficiency	44.282 lm/W
Coordinate System	CG
Total Flux	612.4 lm
Maximum Value	552.42 cd/klm

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T+34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Duo petra

4875


DesignBy Ramos&Bassols

Duo Petra is a surface installation ceiling lamp where the interior features the natural appearance of slate. The Duo Petrea ceiling light becomes a focal point without needing to be suspended.

Model Sheet







Finish	58 Cream RAL 7044 93 White RAL 9016 18 Graphite ADAPTA RF 9913
LED	2700 K / 3500 K / Tunable White
Control	DALI / PUSH 1-10V / CASAMBI
Electrical connection	Surface Canopy
Light source	1 x LED PLATE 12W 350mA G
LED	CRI>90 1100 lm 91.66
Driver	Constant Current 350 mA 110~240 V 50/60 Hz F Dimmable IP20 Bi-volt Multi-volt 4875 _ _ / 11: Static White + DALI-2 4875 _ _ / 1B: Static White + Pulsador; 4875 _ _ / 81: Tunable White + DALI-2 DT8
Application	Ceiling
Packaging	1 Box 0.436 m x 0.436 m x 0.348 m Gross weigth 5 kg Net weigth 4 kg Vol. 0.0661 m3


Lighting effect


General

First layer of basic, general illumination



Photometric Data

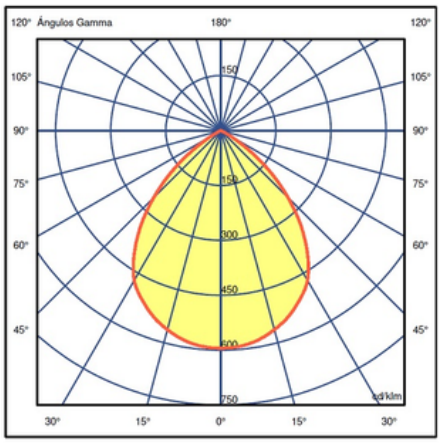

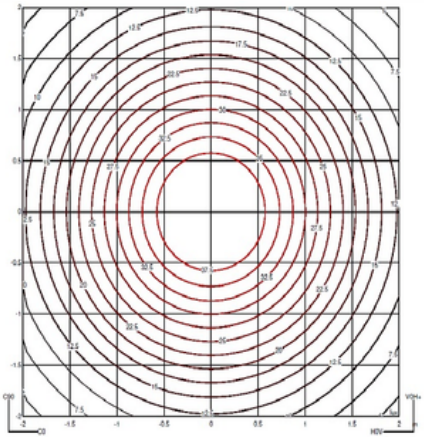

Efficiency	45.317 lm/W
Coordinate System	CG
Total Flux	571.0 lm
Maximum Value	594.57 cd/klm

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T+34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com