Fluted Roller


Linear Pendant

The Fluted Roller features a scolloped solid timber body. The fluted effect creates interesting timber grain detail, and defined highlights and shadows. Minimal LED strip lighting is recessed into the bottom of the timber piece, creating a detail rich minimal pendant light. Crafted in QLD, Australia.




Technical Details	
Dimensions	43mm dia
Material	Solid Hardwood, Aluminium, Opal Acrylic, Integral LED Lighting
Voltage	24V DC
CRI	90
Wattage	14.4W per metre
Lumens	1700lm per metre
Install	Installed with a remote driver. Must be installed by a licensed electrician.
Dimming	Phase Cut (Universal Dimming) Other dimming types on request
Warranty	3 Years

Timber

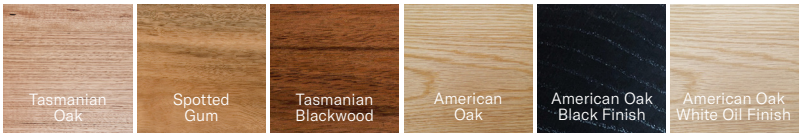

Create a Custom Pendant	
Pendant	Fluted Roller
Timber	Tasmanian Oak Spotted Gum Tasmanian Blackwood American Oak American Oak - Black Finish American Oak - White Oil Finish
Length	900mm 1200mm 1400mm 1500mm 1800mm 2000mm
Gripper Colour	White Black Brass Stainless Steel Custom
LED Colour Temperature	2700K Warm White 3000K Bright Warm White 4000K Cool White
Dimming Type	Phase Cut DALI
Ceiling Plate	Small Plate Ø76 Large Plate Ø106 Canopy Ø80
Ceiling Plate Colour	White Black
Cable Colour	Silver Black White
Drop Length	1.5m Standard Custom

Dimensions

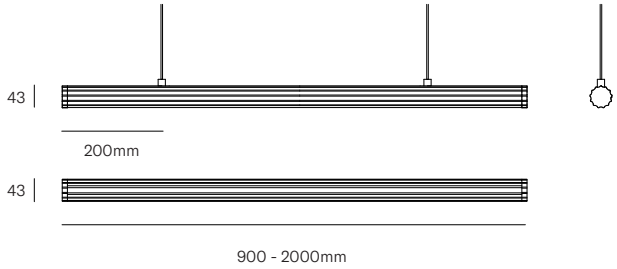


fluxwoodlighting.com sales@fluxwoodlighting.com

fLUXWOOD

Fluted Roller

Linear Pendant

Installation

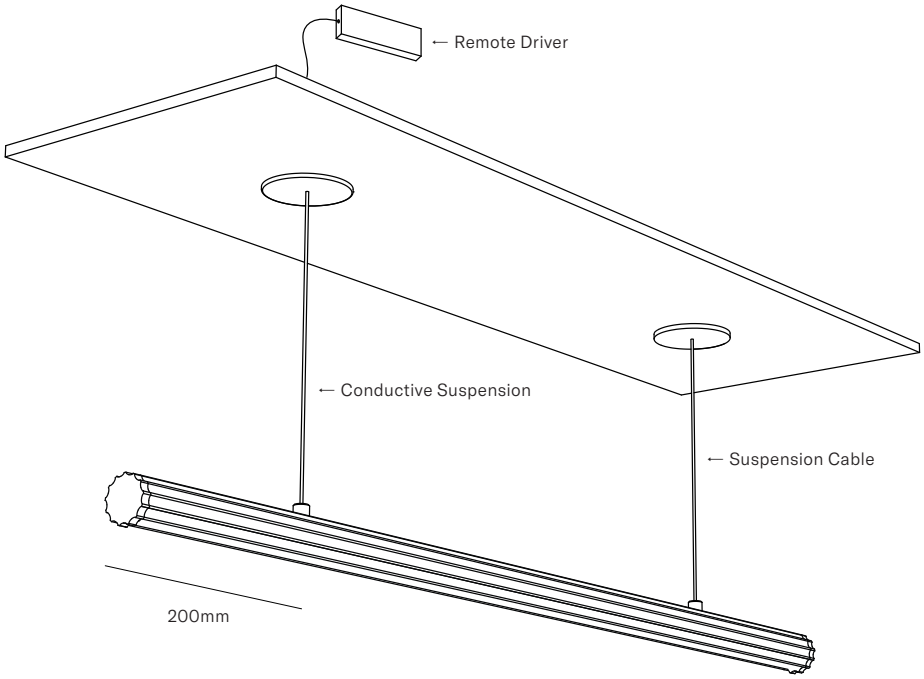


Installation Notes:

All height adjustments are on the ceiling plate, do not adjust the cable at the gripper (fixed to the timber).

The grub screw at the gripper barrell is not to be adjusted. Adjusting this component can damage the power cable, and void the warranty.


Ceiling Plate Details

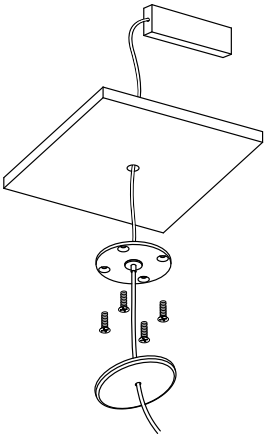

Small Plate
Ø76 x 8mm

Suitable for full ceiling access to place the remote driver from above.


Cutout hole: 10-20mm

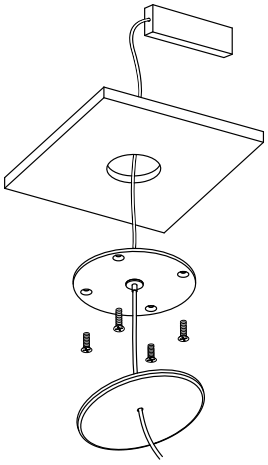

Large Plate
Ø106 x 8mm

Suitable for limited ceiling access to place the remote driver from below.

Cutout hole: 60mm

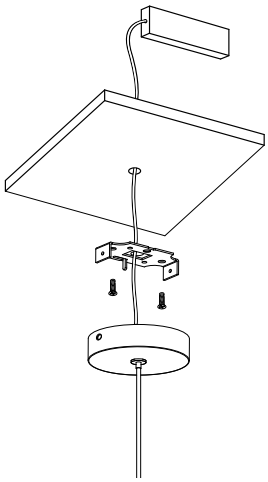

Canopy
Ø80 x 25mm

Suitable for full ceiling access to place the remote driver from above.

Cutout hole: 10-20mm

*Please advise if the installation is on a pitched ceiling.

A flexible knuckle will be provided on the ceiling plate for this installation.