

Locus


Spotlight Series




1




Mini Spike Spotlight




2




Mini Rod Spike Spotlight




3



Spike Spotlight



4



Surface Mounted Spotlight


		LED Power	Lumens (at 2700K)	Beam	Weight	Mounting	Class Rating
1	**Mini Spike Spotlight**	3W (24V DC)	145lm	6° | 20° | 37° | 10x30°	262g	In-ground, Surface mounted	Class III
2	**Mini Rod Spike Spotlight**	3W (24V DC)	145lm	6° | 20° | 37° | 10x30°	620g	In-ground, Surface mounted	Class III
3	**Spike Spotlight**	13W (24V DC)	1065lm	12° | 23° | 40°	1178g	In-ground, Surface mounted	Class III
4	**Surface Mounted Spotlight**	13W (700mA)	1090lm	12° | 23° | 40°	1200g	Surface mounted	Class I

Key Information	
Mounting	In-ground, Surface Mounted
Finish	Textured Black
LED CCT	2700K
Warranty	5 Years

Design	
Product Family	Locus
Adjustability	+90° / -45° Tilt (Lockable)
Material	Powder Coated Aluminium, PVC Spike
IP Rating	IP65

Performance	
Lumen Efficacy	Up to 83.85lm/W
CRI (Ra/R9)	90+ (R9: >50)
UGR (70/50/20)	<10
Lifetime (Ta 25ºC)	>55,000h L90B10 >60,000h L80B10 (mini)
Operating Ambient Temperature	-10º- 35ºC
SDCM	≤3

Driver	
Phasecut 24VDC	Remote, wired in parallel
Phasecut	Built-in

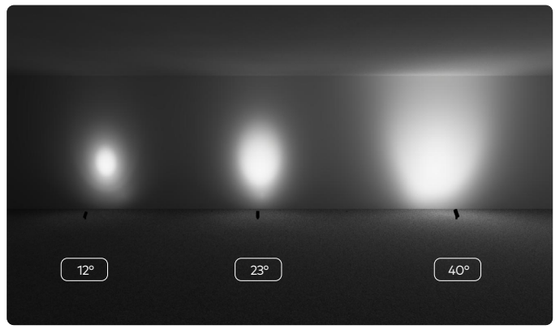

Available Accessories
Locus Mini Treestrap
Locus Treestrap