# Roller

## Linear Pendant


The Roller is a classic dowel pendant with a subtle curved edge to catch the LED light and create a unique gradient effect. A versatile cylindrical pendant crafted from bespoke timbers. Made in Queensland, Australia.




| Technical Details | |
|---|---|
| Dimensions | 43mm dia |
| Material | Solid Hardwood, Aluminium, Opal Acrylic, Integral LED Lighting |
| CRI | 90 |
| Wattage | 14.4W per metre |
| Lumens | 1700lm per metre |
| Voltage | 24V DC |
| Install | Installed with a remote driver. Must be installed by a licensed electrician |
| Dimming | Phase Cut (Universal Dimming)<br>DALI |
| Warranty | 3 Years |

| Create a Custom Pendant | |
|---|---|
| Pendant | Roller |
| Timber | Tasmanian Oak<br>Spotted Gum<br>Tasmanian Blackwood<br>American Oak<br>American Oak - Black Finish<br>American Oak - White Oil Finish<br>Custom Tint Paint Finish |
| Length | 900mm<br>1200mm<br>1500mm<br>1800mm<br>2000mm<br>2200mm<br>2400mm |
| Gripper & Cap Colour | White<br>Black<br>Brass<br>Stainless Steel<br>Eucalypt<br>Custom Powdercoat |
| LED Colour Temperature | 2700K<br>3000K<br>4000K |
| Dimming Type | Phase Cut<br>DALI |
| Ceiling Plate | Small Plate Ø76<br>Large Plate Ø106<br>Canopy Ø80 |
| Ceiling Plate Colour | White<br>Black |
| Cable Colour | Silver<br>Black<br>White |
| Drop Length | 1.5m Standard<br>Custom |

Timber

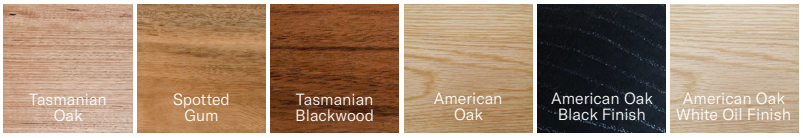



Dimensions

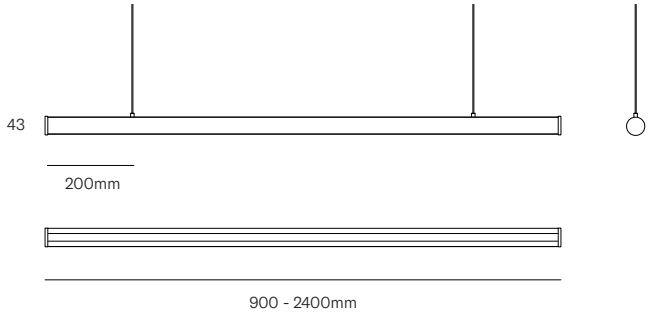

# Roller

## Linear Pendant

Installation

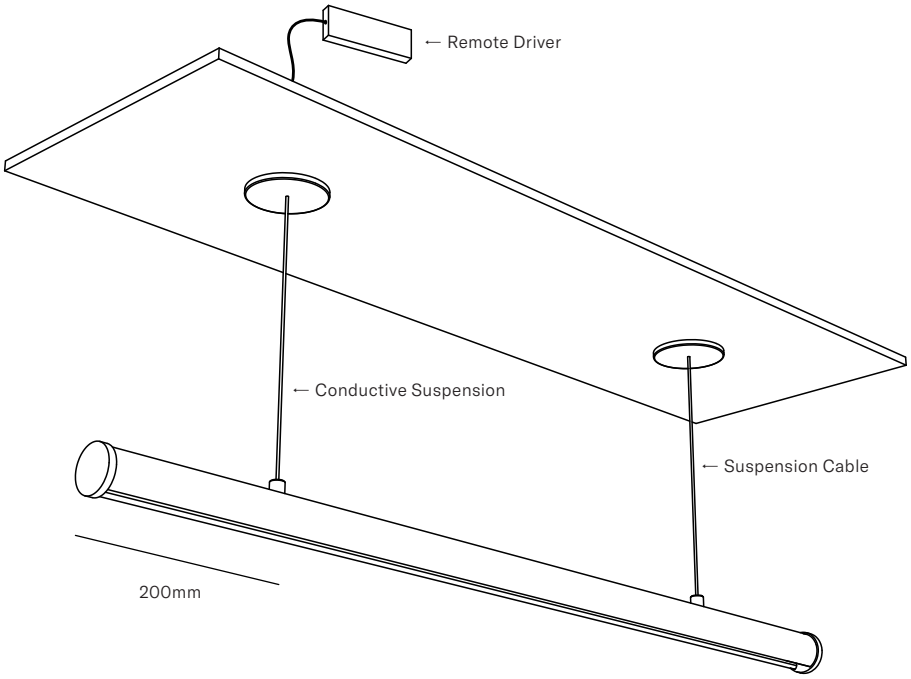



Installation Notes:

All height adjustments are on the ceiling plate, do not adjust the cable at the gripper (fixed to the timber).

The grub screw at the gripper barrell is not to be adjusted. Adjusting this component can damage the power cable, and void the warranty.


Ceiling Plate Details

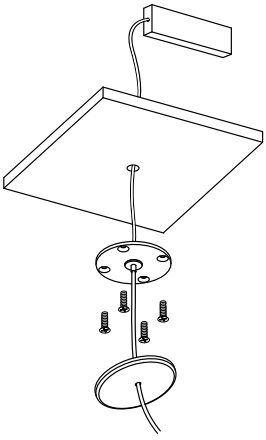

Small Plate
Ø76 x 8mm

Suitable for full ceiling access to place the remote driver from above.


Cutout hole: 10-20mm

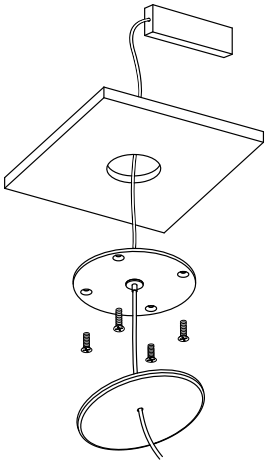

Large Plate
Ø106 x 8mm

Suitable for limited ceiling access to place the remote driver from below.

Cutout hole: 60mm

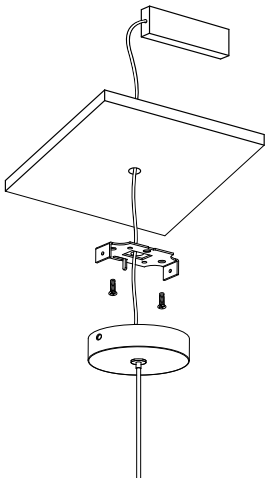

Canopy
Ø80 x 25mm

Suitable for full ceiling access to place the remote driver from above.

Cutout hole: 10-20mm

*Please advise if the installation is on a pitched ceiling.

A flexible knuckle will be provided on the ceiling plate for this installation.