Tenn


Linear Pendant

Tenn has a sleek shape which gets its name from the angle at which the profile is routed, a crisp Ten degrees. Crafted with a high-quality furniture finish in Currumbin, QLD, Australia.




Technical Details	
Dimensions	40w x 45h (mm)
Material	Solid Hardwood, Aluminium, Opal Acrylic, Integral LED Lighting
CRI	90
Wattage	14.4W per metre
Lumens	1700lm per metre
Voltage	24V DC
Install	Installed with a remote driver. Must be installed by a licensed electrician.
Dimming	Phase Cut (Universal Dimming) DALI
Warranty	3 Years

Timber

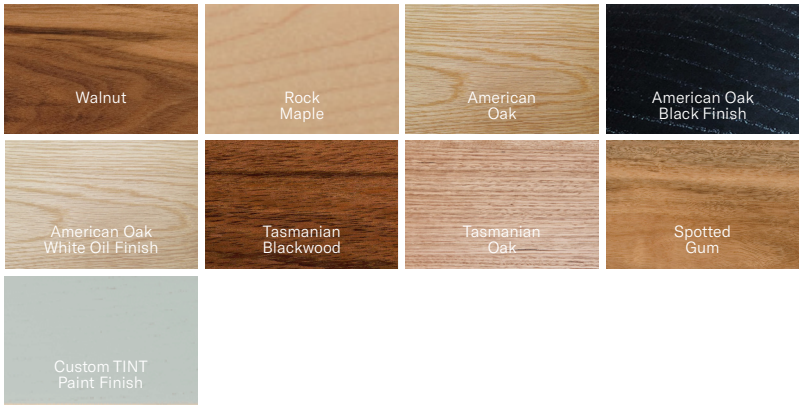

Create a Custom Pendant	
Pendant	Tenn
Timber	Walnut Rock Maple American Oak American Oak - Black Finsih American Oak - White Oil Finish Tasmanian Blackwood Tasmanian Oak Spotted Gum Custom TINT Paint Finish
Length	900mm 1200mm 1500mm 1800mm 2000mm 2400mm 2200mm 2500mm 2800mm 3000mm Custom
Gripper Colour	White Black Brass Stainless Steel Eucalypt Custom
LED Colour Temperature	2700K 3000K 4000K
Dimming Type	Phase-Cut (Standard) DALI
Ceiling Plate	Small Plate Ø76 Large Plate Ø106 Canopy Ø80
Ceiling Plate Colour	White Black
Cable Colour	Silver Black White
Drop Length	1.5m Standard Custom

Dimensions

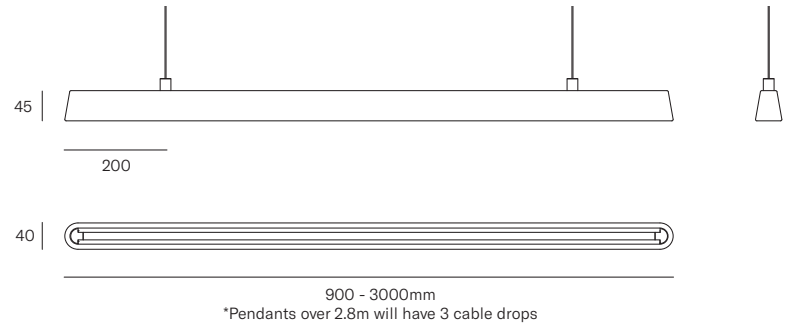


*Pendants over 2.8m will have 3 cable drops

Tenn

Linear Pendant

Installation

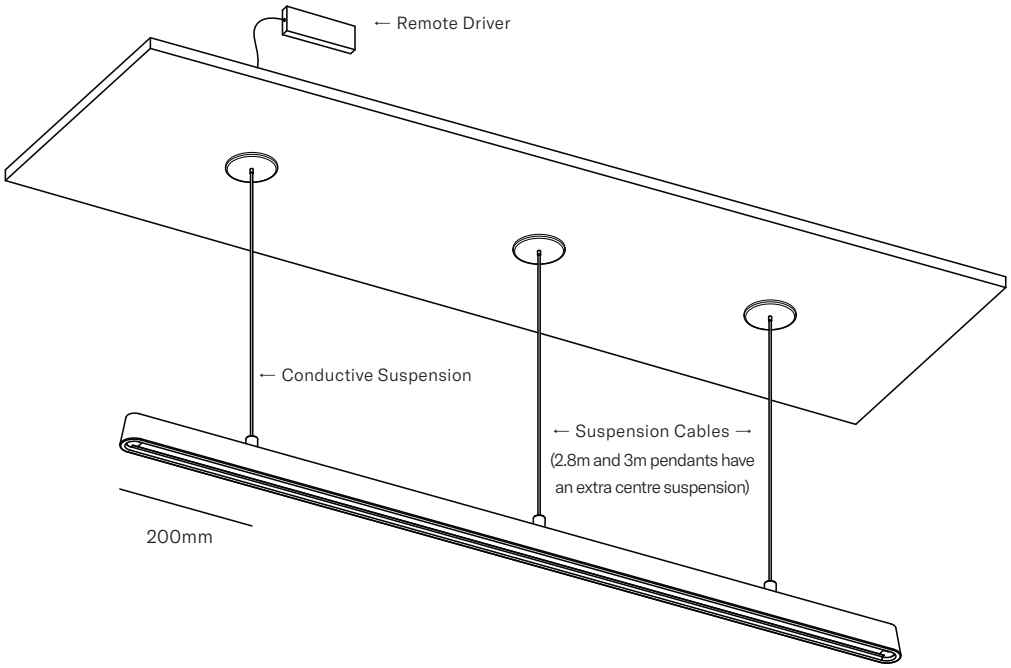


Installation Notes:

All height adjustments are on the ceiling plate, do not adjust the cable at the gripper (fixed to the timber).

The grub screw at the gripper barrell is not to be adjusted. Adjusting this component can damage the power cable, and void the warranty.


Ceiling Plate Details

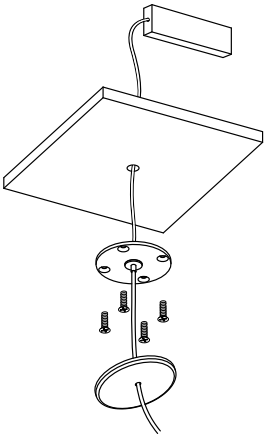

Small Plate
Ø76 x 8mm

Suitable for full ceiling access to place the remote driver from above.


Cutout hole: 10-20mm

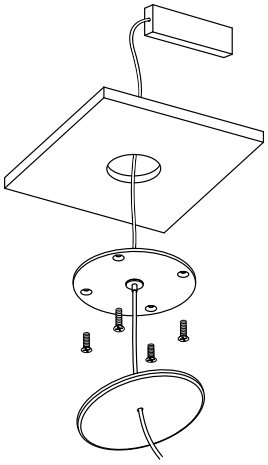

Large Plate
Ø106 x 8mm

Suitable for limited ceiling access to place the remote driver from below.

Cutout hole: 60mm

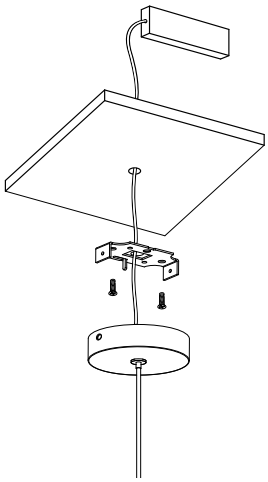

Canopy
Ø80 x 25mm

Suitable for full ceiling access to place the remote driver from above.

Cutout hole: 10-20mm

*Please advise if the installation is on a pitched ceiling.

A flexible knuckle will be provided on the ceiling plate for this installation.