


Learn about the Titanium Collection in more detail.

Visit the website for the Titanium Collection Product Guide.


unios.com/titaniumguide

Titanium G2


Suspended Downlight




1




Small (130mm)




2




Small (200mm)




3



Medium (130mm)



4



Medium (215mm)


		LED Power	Lumens (at 3000K)	Beam	Weight
1 2	**Small**	11W (300mA)	1004lm	15° | 36° | 60° | 75°	1.5kg
3 4	**Medium**	13W (350mA)	1188lm	15° | 36° | 60° | 75°	1.6kg

Key Information	
Mounting	Ceiling Suspended
Finish	Textured Black Textured White Textured Black/Gold Textured White/Gold Textured Black/White Textured White/Black
LED CCT	2700K 3000K 4000K 2700K-6500K (Tunable White) 3000K-1800K (Dusk Dimming)
Warranty	5 Years

Design	
Product Family	Titanium
Material	Powder Coated Aluminium
IP Rating	IP20
Class Rating	Class I
Cable Length	3000mm

Performance	
Lumen Efficacy	Up to 87lm/W
CRI (Ra/R9)	92+ (R9: >50)
UGR (70/50/20)	<16
Lifetime (Ta 25°C)	>55,000h L90B10
Operating Ambient Temperature	-10°- 35°C
SDCM	≤2
COI Compliance Model Requirements	4000K

Driver	
Phase Cut	130mm: Remote, 215mm: Built-in
DALI	130mm: Remote, 215mm: Built-in
Bluetooth	Remote

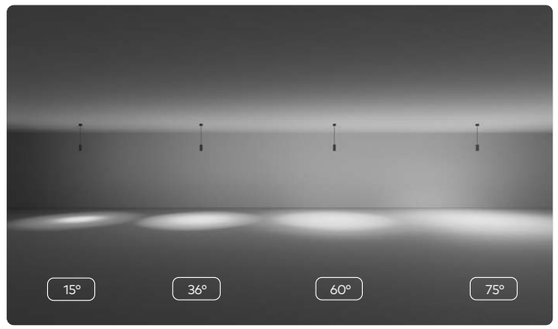

Available Accessories
Linear Lens (for elliptical beams)
Honeycomb Lens (for reduced glare)
Frosted Lens (75° beam)
Rod Suspension Kit

Notes
Luminaire and suspended canister sold separately.