Learn about the Titanium Collection in more detail.


Visit the website for the Titanium Collection Product Guide.


unios.com/titaniumguide





Titanium

Suspended Starlight




















		LED Power	Lumens (at 3000K)	Beam	Weight
1	**260 Suspended Starlight**	5W (150mA)	468lm	36° | 50°	557g
2	**400 Suspended Starlight**	5W (150mA)	468lm	36° | 50°	791g
3	**600 Suspended Starlight**	5W (150mA)	468lm	36° | 50°	1.1kg
4	**800 Suspended Starlight**	5W (150mA)	468lm	36° | 50°	1.4kg

Key Information	
Mounting	Ceiling Suspended
Finish	Textured Black Textured White Textured Black/Gold Textured White/Gold Textured Black/White Textured White/Black
LED CCT	2700K 3000K 4000K
Warranty	5 Years

Design	
Product Family	Titanium
Material	Powder Coated Aluminium
IP Rating	IP20
Class Rating	Class I
Cable Length	3000mm

Performance	
Lumen Efficacy	Up to 77lm/W
CRI (Ra/R9)	92+ (R9: >50)
UGR (70/50/20)	<13
Lifetime (Ta 25ºC)	>55,000h L90B10
Operating Ambient Temperature	-10º- 35ºC
SDCM	≤2
COI Compliance Model Requirements	4000K

Driver	
Phase Cut	Built-in
DALI	Remote

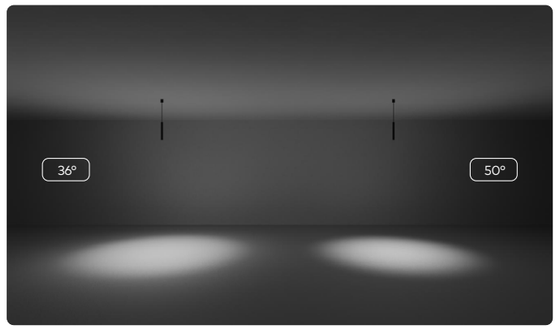

Notes
Luminaire, surface mounted canister and suspension kit sold separately.