

Cleaning

Warning: Before cleaning, disconnect from mains supply and allow luminaire to cool.





Disposal

Ensure correct disposal of this product (waste electrical and electronic equipment).

Corrosion Protection

It is important to note that care must be taken during installation or maintenance to ensure that the surface of the luminaire is not damaged. Any damage, which is exposed to moisture will result in corrosion occurring.

Please also note that any chemical applications on the luminaire or chemical contact via installation will cause corrosion of the surface of the luminaire and will void the warranty.

Ambient Conditions

Recommended to install in an ambient temperature <35ºC.

Basc

WALL LIGHT

Base Codes	Fixed One	Fixed Two	Power
	BAF1	BAF2	3 - 9 Watts

Class I	IP Rating	Material	Install Person/s
220–240V ~ 50/60Hz	IP65	Aluminium	1x

CAUTION – This product must be installed by a qualified installer
Please read instruction manual carefully before installing luminaire


Surge Protection
For comprehensive protection of a luminaire against electrical surges, surge protection shall be installed on the mains supply where required to protect luminaires and drivers from transient voltage damage.

For warranty information visit unios.com/warranty


Please read these installation instructions carefully before installing this product. This product must be installed and maintained by a suitably qualified person/s in compliance with the latest applicable regulations and relevant legislation.

Unios does not warrant any claim based on defects or damage caused by misuse, improper installation, improper operation and/or modifications carried out by the purchaser or third parties. This product shall not be used as a 'working light' during construction. This will result in the warranty of the product to be void. For warranty duration, please refer to the data sheet.

Basc Fixed One
BAF10100
BAF10145



Basc Fixed Two
BAF20100
BAF20145



Sizing Variations

Product Code	A	B	C	D
BAF10100	130	40	100	55
BAF10145	150	38	145	75
BAF20100	150	40	100	-
BAF20145	200	38	145	-


All measurements are in millimetres.


Parts


1x Allen Key



2x Wall Plugs


2x Wall Screws

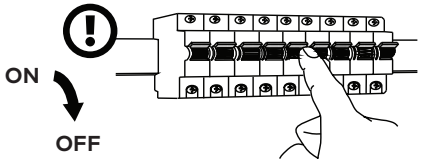

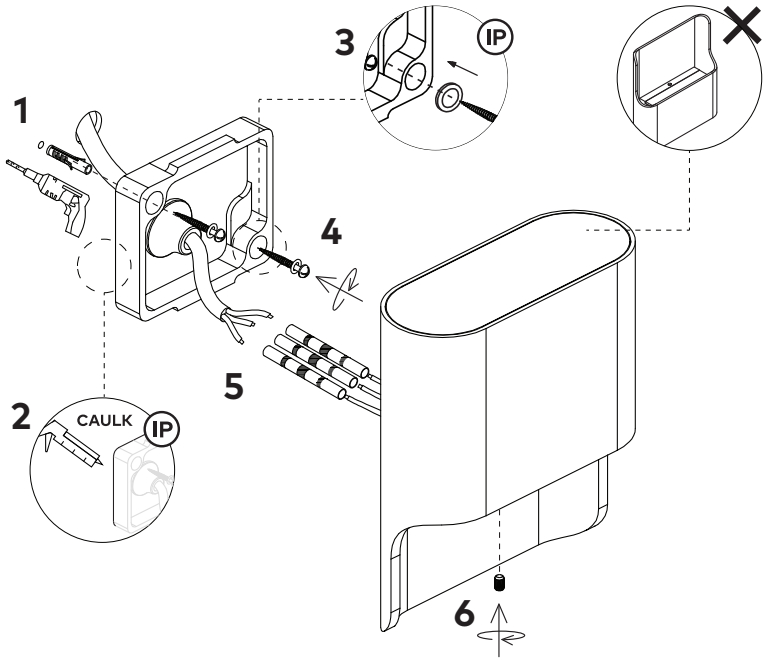

Built-in Wiring

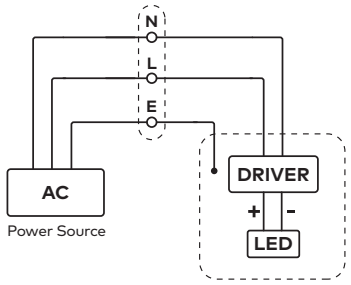


Driver Compatibility

Product Code	Output Power	Driving Current	Forward Voltage
BAF10100	3W	350mA	8-10V
BAF10145	5W	250mA	17-19V
BAF20100	6W	300mA	17-19V
BAF20145	9W	250mA	34-38V

IP65/66 Installations

To ensure a complete seal around the mounting area, an exterior grade caulk must be used around the perimeter of the back of the mounting plate. **Do not caulk bottom of mounting plate to ensure sufficient drainage.**

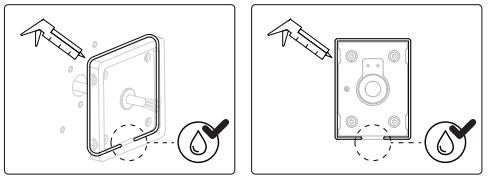


Dimming

This luminaire can be dimmed. Unios® recommends a phase-cut dimmer optimised for LED technology. For non-standard configurations refer to driver data sheet.


For full list of compatible drivers, see unios.com

Mounting Plate


Basc Fixed One
BAF10100




Basc Fixed One
BAF10145

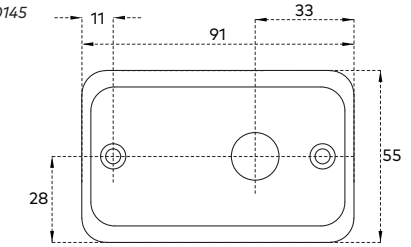

Basc Fixed Two
BAF20100



Basc Fixed Two
BAF20145



All measurements are in millimetres.