
Cleaning

Warning: Before cleaning, disconnect from mains supply and allow luminaire to cool.

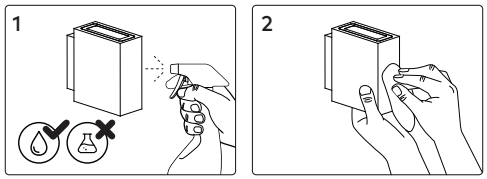

Disposal

Ensure correct disposal of this product (waste electrical and electronic equipment).

Corrosion Protection

It is important to note that care must be taken during installation or maintenance to ensure that the surface of the luminaire is not damaged. Any damage, which is exposed to moisture will result in corrosion occurring.

Please also note that any chemical applications on the luminaire or chemical contact via installation will cause corrosion of the surface of the luminaire and will void the warranty.

Ambient Conditions

Recommended to install in an ambient temperature <35ºC.

Cuadro

WALL LIGHT

Base Codes	2W	8W	Power
	CUAD0002	CUAD0008	2 | 8 Watts

Class III	IP Rating	Material	Install Person/s
24V DC	65	Aluminium	1x


CAUTION – This product must be installed by a qualified installer
Please read instruction manual carefully before installing luminaire

Surge Protection
For comprehensive protection of a luminaire against electrical surges, surge protection shall be installed on the mains supply where required to protect luminaires and drivers from transient voltage damage.

For warranty information visit unios.com/warranty

Please read these installation instructions carefully before installing this product. This product must be installed and maintained by a suitably qualified person/s in compliance with the latest applicable regulations and relevant legislation.

Unios does not warrant any claim based on defects or damage caused by misuse, improper installation, improper operation and/or modifications carried out by the purchaser or third parties. This product shall not be used as a 'working light' during construction. This will result in the warranty of the product to be void. For warranty duration, please refer to the data sheet.

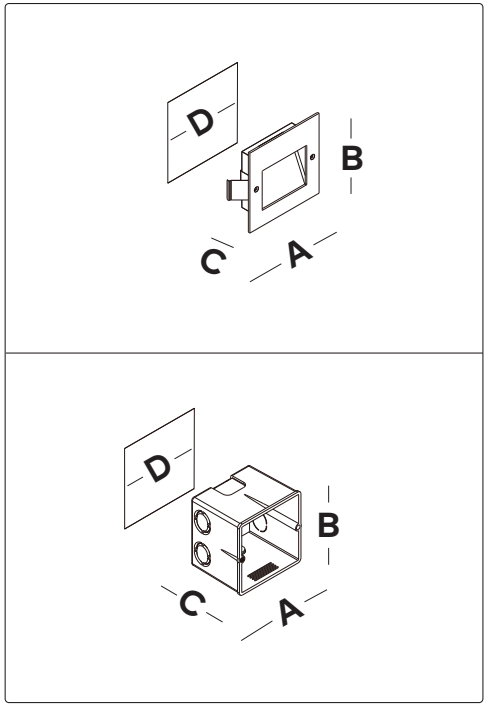


Sizing Variations


Luminaire

Product Code	A	B	C	D
CUAD0002	90	90	24	77x77
CUAD0008	235	90	24	220x72
Wallbox				
CUAD0002	80	80	65	82x82
CUAD0008	226	76	65	227x77


All measurements are in millimetres.

Parts

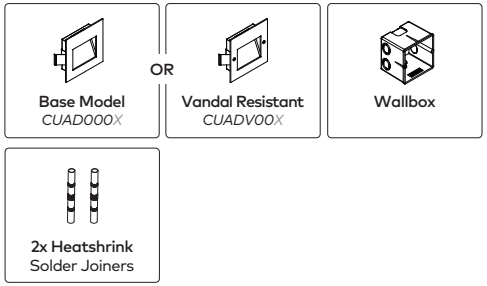


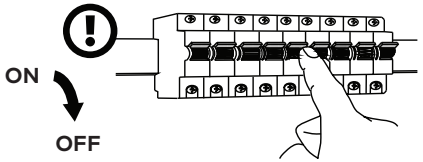


2W
CUAD0002

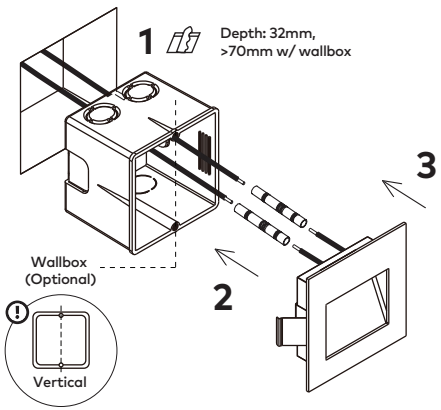


2W
CUADV002

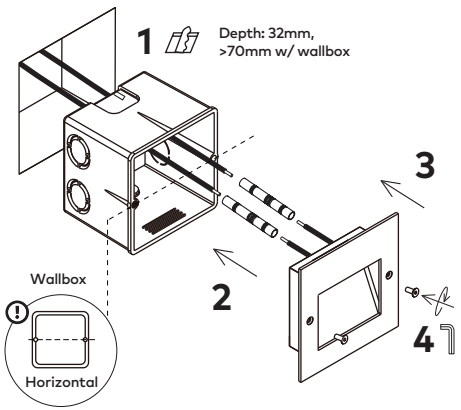


8W
CUAD0008

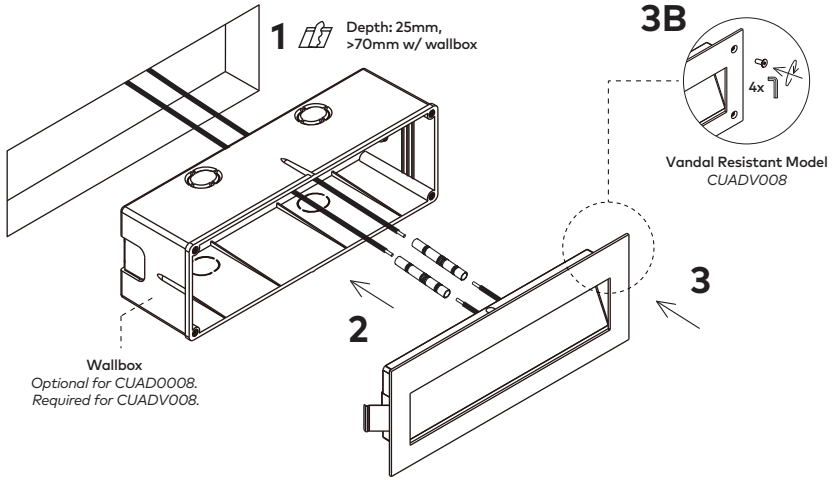


Wiring

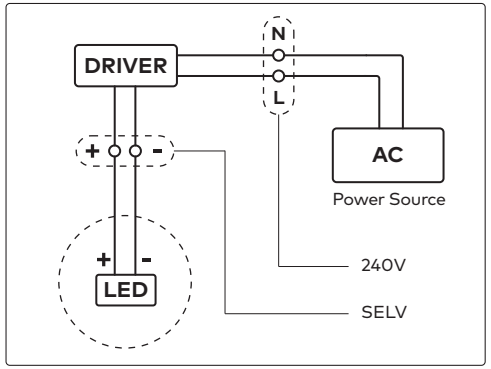

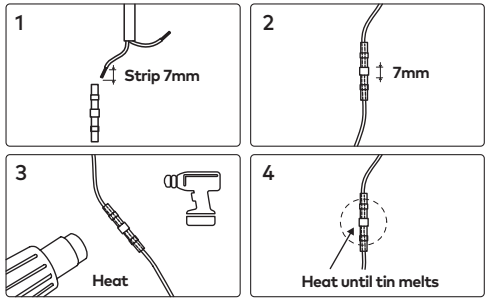

IP Connection

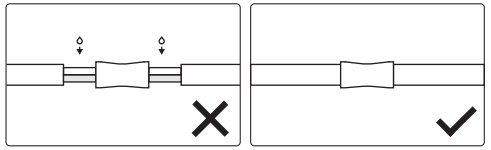

Driver Selection

Product Code	Output Power	Forward Voltage
CUAD0002	2W	24V DC
CUAD0008	8W	24V DC

Dimming

For dimming capabilities, luminaire must be paired with dimmable driver. Please refer to driver's instructions for pairing of suitable systems.