Umber

Linear Pendant


Umber is a low-glare linear pendant designed for perfectly illuminating kitchen islands.




Technical Details	
Dimensions	45w x 60h (mm)
Material	Solid Hardwood, Aluminium, Opal Acrylic, Integral LED Lighting
CRI	90
Wattage	14.4W per metre
Voltage	24V DC
Lumens	1700lm per metre
Install	Installed with a remote driver. Must be installed by a licensed electrician.
Dimming	Phase Cut (Universal Dimming) DALI
Warranty	3 Years

Create a Custom Umber Pendant	
Pendant	Umber
Timber	Walnut Rock Maple American Oak American Oak - Black Finsih American Oak - White Oil Finish Tasmanian Blackwood Tasmanian Oak Spotted Gum Custom Tint Paint Finish
Length	900mm 1200mm 1500mm 1800mm 2000mm 2200mm 2500mm 2800mm 3000mm
LED Colour Temperature	2700K 3000K 4000K
Dimming Type	Phase Cut DALI
Ceiling Plate	Small Plate Ø76 Large Plate Ø106
Ceiling Plate Colour	White Black
Rod Colour	Brass Black White
Drop Length	Custom

Timber

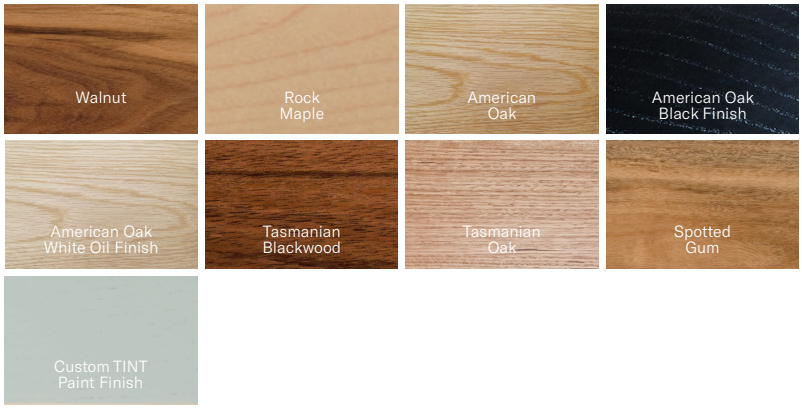


Dimensions

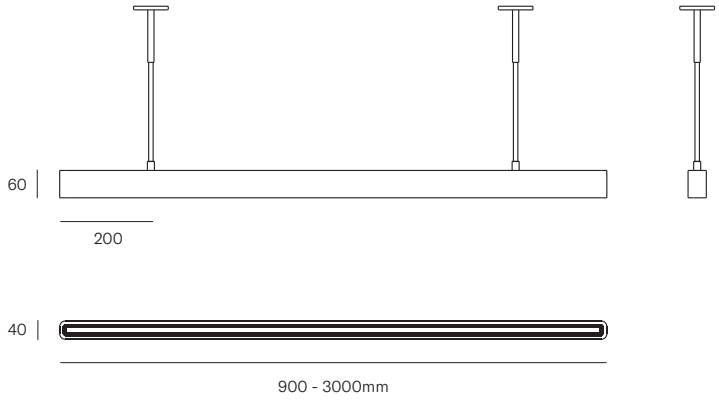

Umber

Linear Pendant

Rod Installation Guide

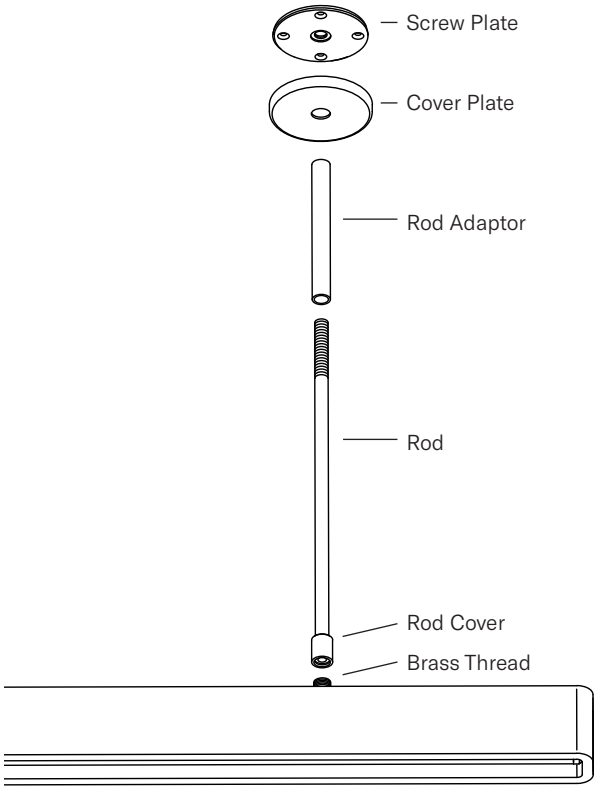

The rod assemblies will arrive packed seperatley.
A brass thread is fixed to the timber at the rod locations.

1. Install the rods onto the timber by threading the rod cover and rod onto the brass thread.

2. Install the screw plate to the ceiling. (The screw plate will arrive already fixed to the cover plate and rod adaptor). Ensure the appropraite fastners are used for your ceiling substrate.


3. Complete the electrical terminations.

4. Lift the pendant up into the rod adaptors and screw the rods into each rod adaptor. (Adjust the height by twisting the rod, allowing the threads to engage well).

*There is 20mm of height adjustment within the threads. You may have to lift the fitting slightly to spin the rods if heavy.

*When levelling the pendant - watch for exposed thread bewteen the rods and rod adaptor, this is sign the rod is about to fall out. Ensure the rod thread is enaged enough into the rod adaptor.


Ceiling Plate Details

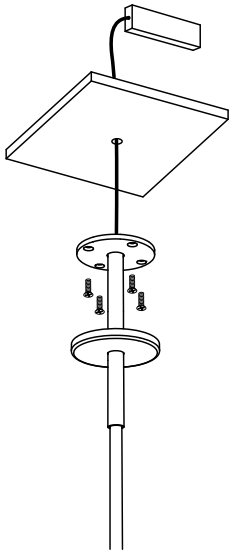

Small Plate
Ø76 x 8mm

Suitable for full ceiling access to place the remote driver from above.

Cutout hole: 10-20mm

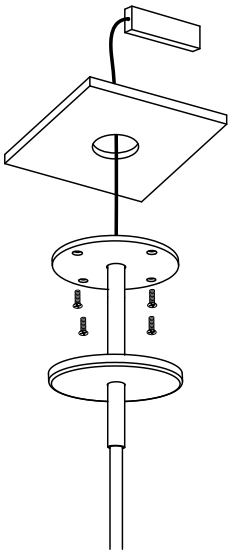

Large Plate
Ø106 x 8mm

Suitable for limited ceiling access to place the remote driver from below.

Cutout hole: 60mm