
Dots

4660


DesignBy MartínAzúa

The Dots reading lamp is a compact, circular wall sconce that offers focused illumination. The luminaire can be turned to direct a cone-shaped beam of light precisely where needed. Available in solid wood from sustainable forests or lacquered in four Chromatica colours.

Model Sheet

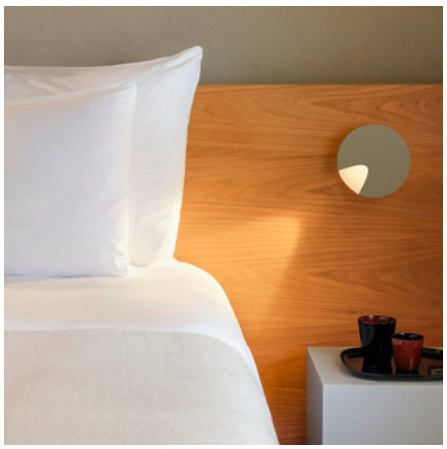





Finish	37 Terra Red NCS S 4040-Y70R
	82 White oak Natural Oak Wood
	27 Sand NCS S 1505-Y50R
	13 Off-White NCS S 1000-N
	47 Green L1 NCS S 4005-G80Y
	83 American Natural Wallnut
LED	2700 K / 3500 K
Control	1-10V / On / Off / DALI-2 / TRIAC
Electrical connection	Surface Canopy
Light source	1 x LED 5,75W 500mA F
LED	CRI>90 500 lm 87
Driver	Constant Current 500 mA 220~240 V 50/60 Hz F LED IP20 50-60Hz 0-10V
Remarks	22º light halo
Application	Wall
Packaging	1 Box 0.21 m x 0.2 m x 0.13 m Gross weigth 0.65 kg Net weigth 0.4 kg Vol. 0.0054 m3


Lighting effect


Reading

High intensity, glare-free task lighting



Photometric Data

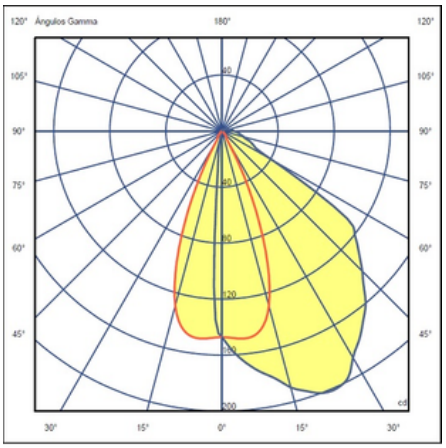

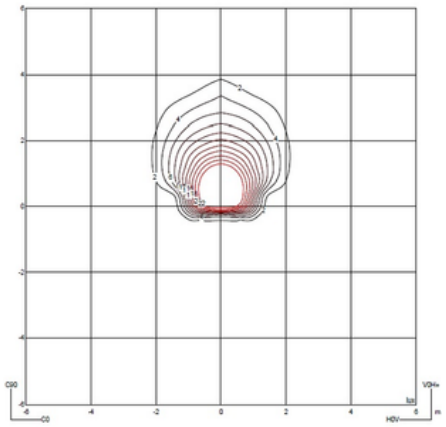

Efficiency	21.52 lm/W
Coordinate System	CG
Total Flux	170.03 lm
Maximum Value	201.33 cd

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina

Progrés4-6,08850Gavà. Barcelona, Spain.

International T+34 934 796 971

Spain / Portugal T +34 934 796 970

customer.service@vibia.com

vibia.com


Dots

4662


DesignBy MartínAzúa

The Dots reading lamp is a compact, circular wall sconce that offers focused illumination. The luminaire can be turned to direct a cone-shaped beam of light precisely where needed. Available in solid wood from sustainable forests or lacquered in four Chromatica colours. Equipped with switch on the wall plate.

Model Sheet

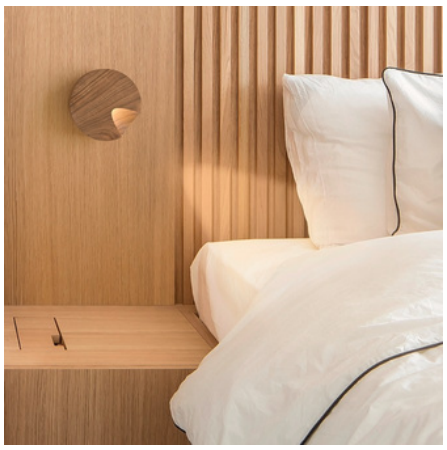





Finish	83 American Natural Wallnut
	13 Off-White NCS S 1000-N
	27 Sand NCS S 1505-Y50R
	37 Terra Red NCS S 4040-Y70R
	82 White oak Natural Oak Wood
	47 Green L1 NCS S 4005-G80Y
LED	2700 K / 3500 K
Control	On / Off / TRIAC
Electrical connection	Surface Canopy
Light source	1 x LED 5,75W 500mA
	F
LED	CRI>90 500 lm 87
Driver	Constant Current 500 mA 220~240 V 50/60 Hz
	F LED IP20 50-60Hz 1-10V
Application	Wall
Packaging	1 Box 0.21 m x 0.2 m x 0.13 m Gross weigth 0.65 kg Net weigth 0.4 kg Vol. 0.0054 m3


Lighting effect


Reading

High intensity, glare-free task lighting



Photometric Data

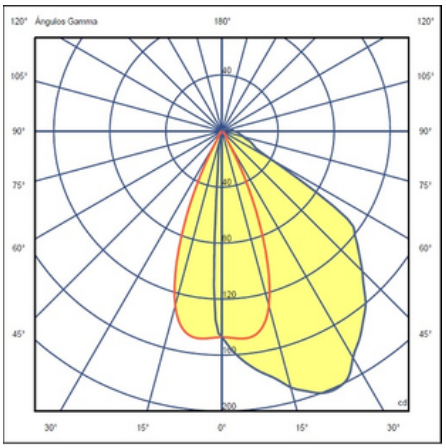

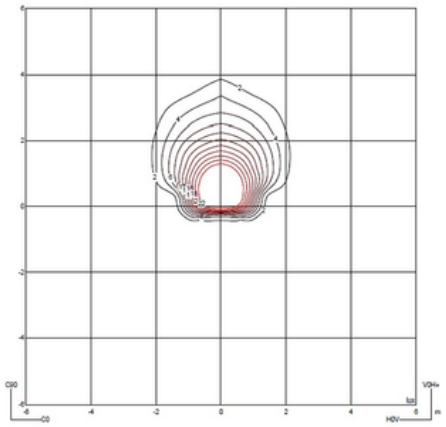

Efficiency	21.52 lm/W
Coordinate System	CG
Total Flux	170.03 lm
Maximum Value	201.33 cd

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T+34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com

Dots

4665


DesignBy MartínAzúa

The Dots indirect lamp is a compact, circular wall sconce that offers diffuse lighting effects. The luminaire features a concave form that reflects light off its lacquered surface like the glow of the moon at night. Available in four lacquered Chromatica colours.

Model Sheet







Finish	27 Sand NCS S 1505-Y50R
	13 Off-White NCS S 1000-N
	47 Green L1 NCS S 4005-G80Y
	37 Terra Red NCS S 4040-Y70R
LED	2700 K / 3500 K
Control	On / Off
Electrical connection	Surface Canopy
Light source	1 x LED 5,75W 500mA
	F
LED	CRI>90 500 lm 87
Driver	Constant Current 500 mA 220~240 V 50/60 Hz
	F LED IP20 50-60Hz
Application	Wall
Packaging	1 Box 0.21 m x 0.2 m x 0.13 m Gross weigth 0.65 kg Net weigth 0.4 kg Vol. 0.0054 m3


Lighting effect


Reflected

Creation of visual hierarchies within the luminaire itself, emphasising the materiality and texture of the



Photometric Data

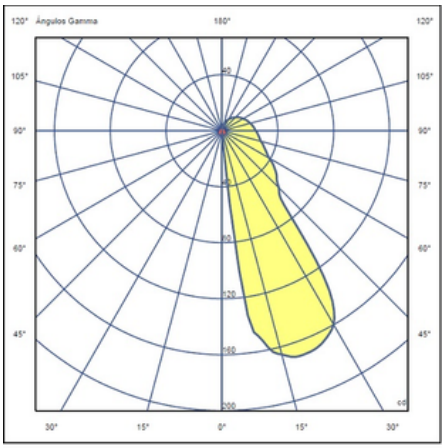

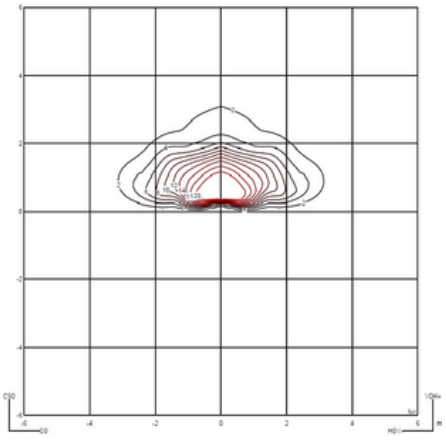

Efficiency	22.72 lm/W
Coordinate System	CG
Total Flux	183.09 lm
Maximum Value	170.27 cd

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina

Progrés4-6,08850Gavà. Barcelona, Spain.

International T+34 934 796 971

Spain / Portugal T +34 934 796 970

customer.service@vibia.com

vibia.com


Dots

4670


DesignBy MartínAzúa

The Dots directional lamp is a compact, circular wall sconce that offers graphic lighting effects. The luminaire can be turned to direct a cone-shaped beam of light precisely where needed, creating a dramatic play of light and shadow against a wall. Available in solid wood from sustainable forests or lacquered in four Chromatica colours.

Model Sheet

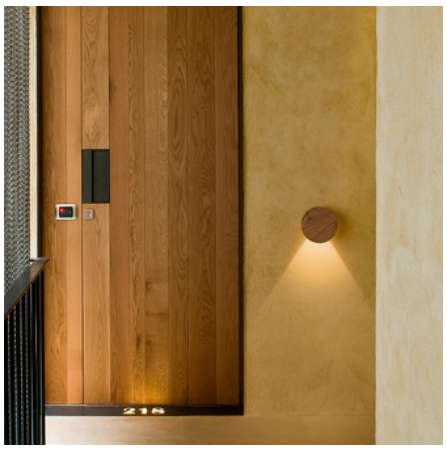





Finish	47 Green L1 NCS S 4005-G80Y
	27 Sand NCS S 1505-Y50R
	37 Terra Red NCS S 4040-Y70R
	83 American Natural Wallnut
	13 Off-White NCS S 1000-N
	82 White oak Natural Oak Wood
LED	2700 K / 3500 K
Control	DALI-2 / 1-10V / On / Off / TRIAC
Electrical connection	Surface Canopy
Light source	1 x LED 5,75W 500mA F
LED	CRI>90 500 lm 87
Driver	Constant Current 500 mA 220~240 V 50/60 Hz F LED IP20 50-60Hz 0-10V
Application	Wall
Packaging	1 Box 0.21 m x 0.2 m x 0.13 m Gross weigth 0.65 kg Net weigth 0.4 kg Vol. 0.0054 m3


Lighting effect


Direct Surface Grazer

Directed grazing light.



Photometric Data

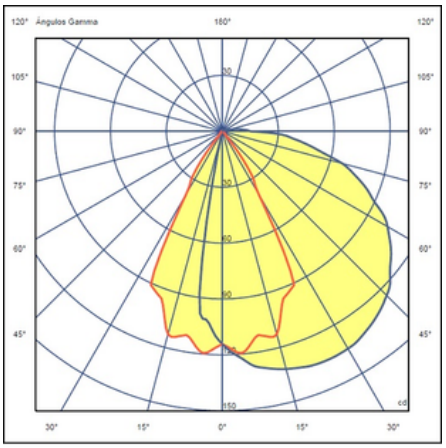

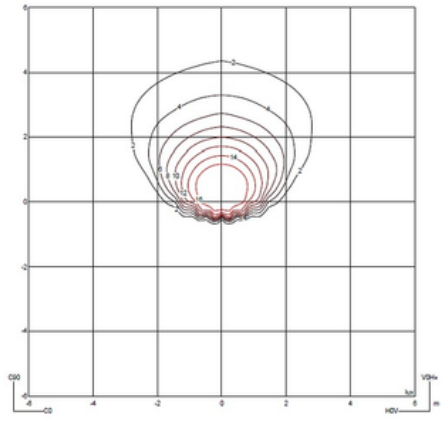

Efficiency	26.23 lm/W
Coordinate System	CG
Total Flux	210.61 lm
Maximum Value	135.07 cd

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina

Progrés4-6,08850Gavà. Barcelona, Spain.

International T+34 934 796 971

Spain / Portugal T +34 934 796 970

customer.service@vibia.com

vibia.com

Dots


4675


DesignBy MartínAzúa

The Dots ambient lamp is a compact, circular wall sconce that offers diffuse lighting effects. The fixture rests slightly apart from the wall, radiating an indirect glow around its perimeter like a halo. Available in solid wood from sustainable forests or lacquered in four Chromatica colours.

Model Sheet



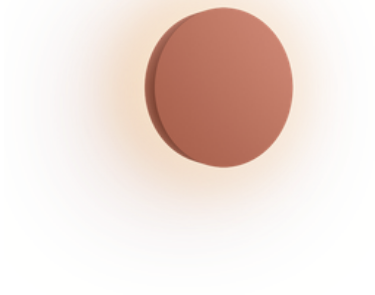



Finish	37 Terra Red NCS S 4040-Y70R
	27 Sand NCS S 1505-Y50R
	47 Green L1 NCS S 4005-G80Y
	82 White oak Natural Oak Wood
	13 Off-White NCS S 1000-N
	83 American Natural Wallnut
LED	2700 K / 3500 K
Control	On / Off / DALI-2 / 1-10V / TRIAC
Electrical connection	Surface Canopy
Light source	1 x LED PLATE 4,5W 500mA E
LED	CRI>90 400 lm 89
Driver	Constant Current 500 mA 100~240 V 50/60 Hz F LED IP20 Bi-volt 50-60Hz 0-10V
Application	Wall
Packaging	1 Box 0.21 m x 0.2 m x 0.13 m Gross weigth 0.65 kg Net weigth 0.4 kg Vol. 0.0054 m3


Lighting effect


360° Surface Grazer

Full-circle grazing light.



Photometric Data

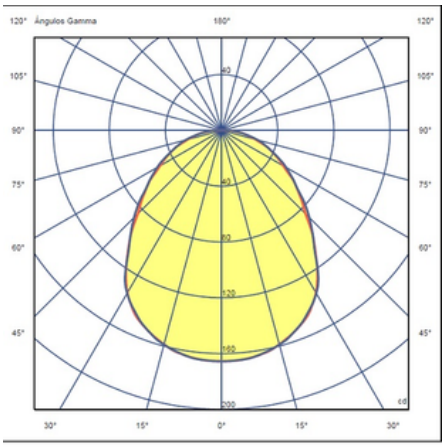

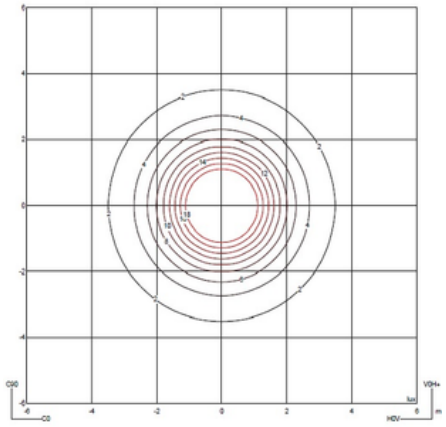

Efficiency	65.93 lm/W
Coordinate System	CG
Total Flux	406.13 lm
Maximum Value	165.51 cd

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6, 08850 Gavà. Barcelona, Spain.

International T+34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com